



STRATO

PORCELAIN PAVER COLLECTION

MADE IN USA

PENN 2

RECTIFIED
COLLECTION




SHADE VARIATION
HIGH



THICKNESS
2 CM

MADE IN USA


BLUE

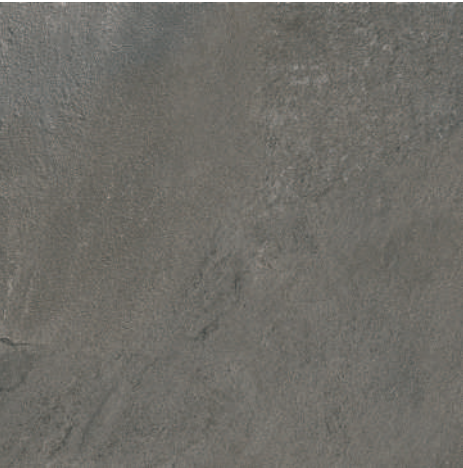

S9ST146R

24"x24" . 60x60 cm Rect.

FULL

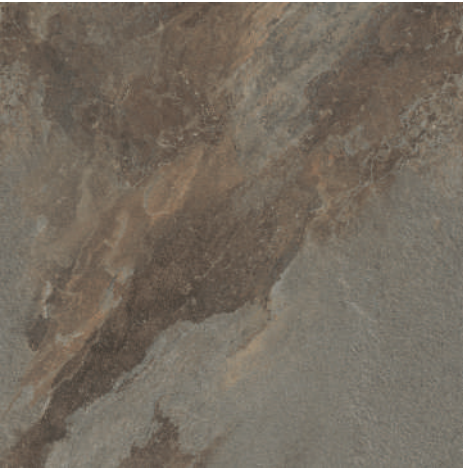

S9ST112R

24"x24" . 60x60 cm Rect.

QUARTZ 2

RECTIFIED
COLLECTION



SHADE VARIATION
HIGH



THICKNESS
2 CM

MADE IN USA

WHITE



S9ST20R

24"x24" . 60x60 cm Rect.

MULTI



S9ST08R

24"x24" . 60x60 cm Rect.

GREY



S9ST05R

24"x24" . 60x60 cm Rect.



SLATE 2

RECTIFIED
COLLECTION



SHADE VARIATION
HIGH



THICKNESS
2 CM

MADE IN USA

WHITE



S9ST10R
24"x24" . 60x60 cm Rect.

SILVER



S9ST25R
24"x24" . 60x60 cm Rect.



TRAVERTINI 2

RECTIFIED
COLLECTION



SHADE VARIATION
MODERATE



THICKNESS
2 CM

MADE IN USA

BEIGE



S9ST01R
24"x24" . 60x60 cm Rect.

SILVER



S9ST15R
24"x24" . 60x60 cm Rect.




POOL COPING

THICKNESS
2 CM

MADE IN USA

Pool Coping with modern edge

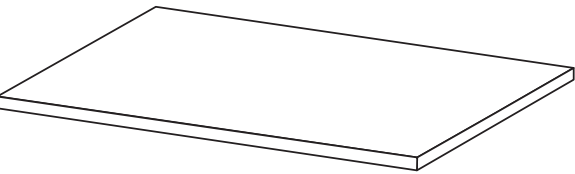

S8TS146MC
PENN BLUE MODERN COPING
12"x24" . 30x60 cm

S8TS112MC
PENN FULL MODERN COPING
12"x24" . 30x60 cm

S8TS20MC
QUARTZ WHITE MODERN COPING
12"x24" . 30x60 cm

S8TS08MC
QUARTZ MULTI MODERN COPING
12"x24" . 30x60 cm

S8TS05MC
QUARTZ GRAY MODERN COPING
12"x24" . 30x60 cm



S8TS10MC
SLATE WHITE MODERN COPING
12"x24" . 30x60 cm

S8TS25MC
SLATE SILVER MODERN COPING
12"x24" . 30x60 cm

S8TS01MC
TRAVERTINI BEIGE MODERN COPING
12"x24" . 30x60 cm


S8TS15MC
TRAVERTINI SILVER MODERN COPING
12"x24" . 30x60 cm

INSTALLATION SYSTEMS


Installation on grass




Installation on gravel

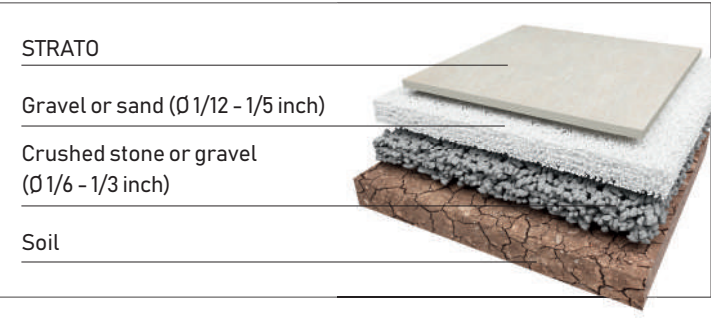

Installation on concrete slab

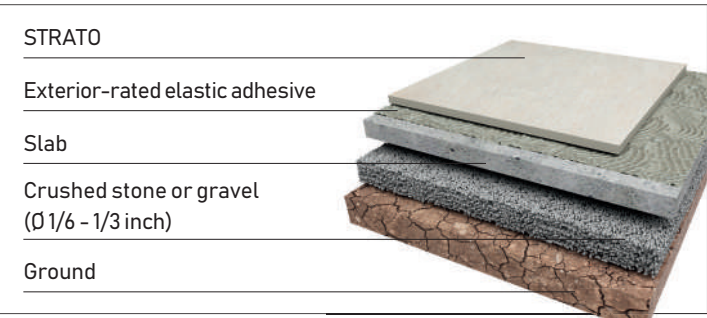

Installation on pedestals

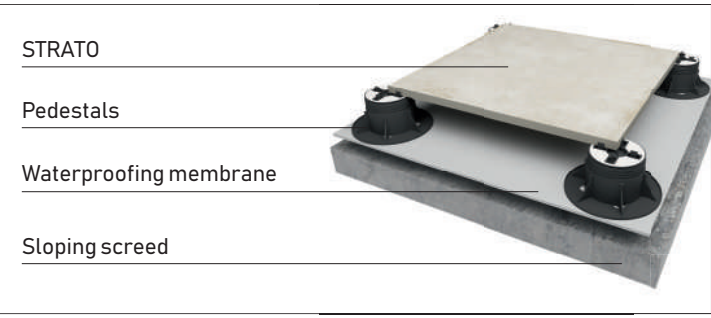

The stratigraphy shown is only an indication: we recommended referring to local regulations in order to achieve a correct installation.

PACKAGING

						
Sizes	Pieces	Sq.Ft.	Lbs.	Boxes	Sq.Ft.	Lbs.
24"x24" . 60x60 cm	2	7.75	71.17	32	248.00	2277.30
12"x24" . 30x60 cm pool coping	2	3.87	35.58	-	-	-

TECHNICAL CHARACTERISTICS

ANSI A 137.1 COLOR-BODY PORCELAIN PAVERS 2 CM THICK

		Established limits	Performances	Norms
	Water absorption	$\leq 0,5\%$	~ 0,1%	ASTM C 373
	Breaking strength (1)	≥ 250 lbf.	~3000 lbf.	ASTM C 648
	Frost resistance	Resistant	Resistant	ASTM C 1026
	Resistance to thermal shock	Resistant	Resistant	ASTM C 484
	Average breaking load for raised floor installation (2)		Classe 1 > 4 kN	EN 12825*
	Mechanical strength (3)		U7	EN 1339-F*
	Slip resistance (DCOF)	$\geq 0,42$	$\geq 0,60$	ANSI A 326.3:2017 release 2019. (DCOF)
	Chemical resistance	As reported	Class: A	ASTM C 650
	Stain resistance	As reported	Class: A	ASTM C 1378
	Recommended use			

* Tests carried out on a different type from that for which the standard is issued

- (1) It states the resistance of a sample piece, leaning on three spots, to a concentrated load placed in the middle.
- (2) It shows the resistance, on raised floor laying as suggested by the catalogue, to a concentrated load applied in the middle.
- (3) It shows the breaking resistance through bending of the product in full size.
The load is applied through a horizontal cylinder placed in the middle.